

E-Z LIFT PRO

IMPORTANT WATCH BEFORE YOU START

To ensure a smooth and successful installation:
Scan the QR code below and watch the full
installation video in detail before
beginning your installation.

This step is required to avoid mistakes,
save time, and protect your warranty.



Scan Here

EZgaragestorageUSA.com/diy-install-videos

**IMPORTANT: READ THROUGH ENTIRE INSTRUCTIONS
BEFORE BEGINNING ANY INSTALLATION**



E-Z GARAGE STORAGE – WARRANTY SUMMARY

Thank you for choosing **E-Z Garage Storage**. We stand behind the quality of our products and want you to enjoy a safe and reliable storage solution for years to come.

Products Covered:

- E-Z Lift – 400 lb load capacity (4'X4', 4'X6', 4'X8').
- E-Z Lift Pro – 700 lb load capacity (4'X8').

Warranty Period:

Your product is covered by a **5-Year Limited Warranty** against defects in materials and workmanship.

What's Covered:

- Repair or replacement of defective parts or product (at E-Z Garage Storage's discretion).
- Warranty valid only for the original purchaser with proof of purchase.

Not Covered:

- Improper installation, misuse, overloading, or modifications.
- Exceeding the load capacity (400 lb for E-Z Lift, 700 lb for E-Z Lift Pro).
- Labor, removal, reinstallation, shipping, or transit damage.
- Cosmetic issues such as scratches, rust, or discoloration not affecting performance.

Installation & Safety Requirements:

- Follow all instructions carefully, including the installation video.
- Do not exceed the weight limit.
- Inspect and tighten all hardware at least once per year.
- Do not install more than **two (2) units** on the same set of rafters, trusses, or ceiling studs.
- Failure to follow these rules **voids your warranty**.

Missing a Part?

No need to return the unit to the store.

Contact us directly: contact@ezgaragestorageusa.com

Warranty Claims:

- To make a claim, please provide:
 1. Proof of purchase (receipt or invoice).
 2. A description of the issue.
 3. Photos if requested.

E-Z Garage Storage USA

Email: contact@ezgaragestorageusa.com

Website: www.ezgaragestorageusa.com/

Phone: 480-907-3921

■ ■ **Important Notice:** Failure to follow installation instructions or exceeding weight limits will void this warranty.

HANDYMAN OR CONTRACTOR?

BECOME AN
AUTHORIZED DEALER




ASK ABOUT OUR
WHOLESALE
PROGRAM 😎



SCAN TO APPLY



E-Z Lift Pro

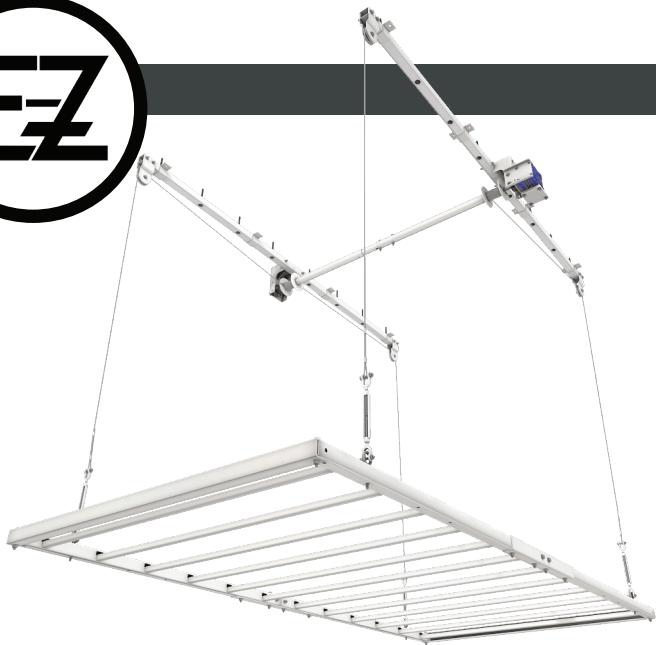

E-Z LIFT PRO STORAGE SYSTEM

REQUIRED TOOLS:



18v Cordless Drill with
Half-Inch Chuck



Ladder



Stud Finder



Tape Measure



Safety Glasses



Marking Pencil



Standard Socket Set



3/16" Drill Bit



Socket Extender
(Optional)



Rubber Mallet



Level



Adjustable Wrench



E-Z Lift Pro

STEP 1: UNBOX YOUR E-Z LIFT PRO

- Confirm all parts are included



PARTS INCLUDED: E-Z LIFT PRO

PARTS INCLUDED IN YOUR E-Z LIFT PRO:



Ceiling Support Rail Halves (x4)



Half Axle-Rod
and Large Washer



Half Axle-Rod with Gearbox



Axle-Mount



Cables (x2) with Turnbuckles
and Eye Bolts (x4)



Security Pin



E-Z Lift Pro

STEP 1: UNBOX YOUR E-Z LIFT PRO



Frame Sides (x4)



Frame Ends (x2)



Support Bars (x12)
Plastic Plugs (x24)



Frame and Rail
Connectors (x2)



U Clamps (x8)



Lag Screws
and Washers (x16)



Hex Bolts (x20)
and Star Nuts (x20)



Nylock Nuts (x6)



Drill Rod



CONFIGURATION OPTIONS

The E-Z Lift Pro can be mounted in two orientations:

E-Z LIFT PRO

PARALLEL WITH CEILING JOISTS



PERPENDICULAR TO CEILING JOISTS







MOUNT YOUR SUPPORT RAILS

STEP 1: MOUNT YOUR SUPPORT RAILS


Use a **Stud Finder** to locate ceiling joists.

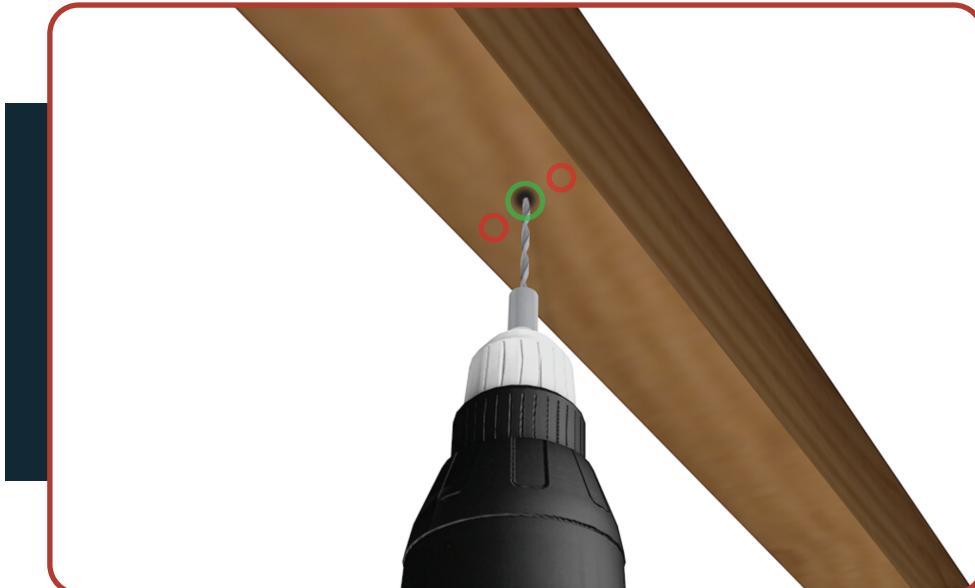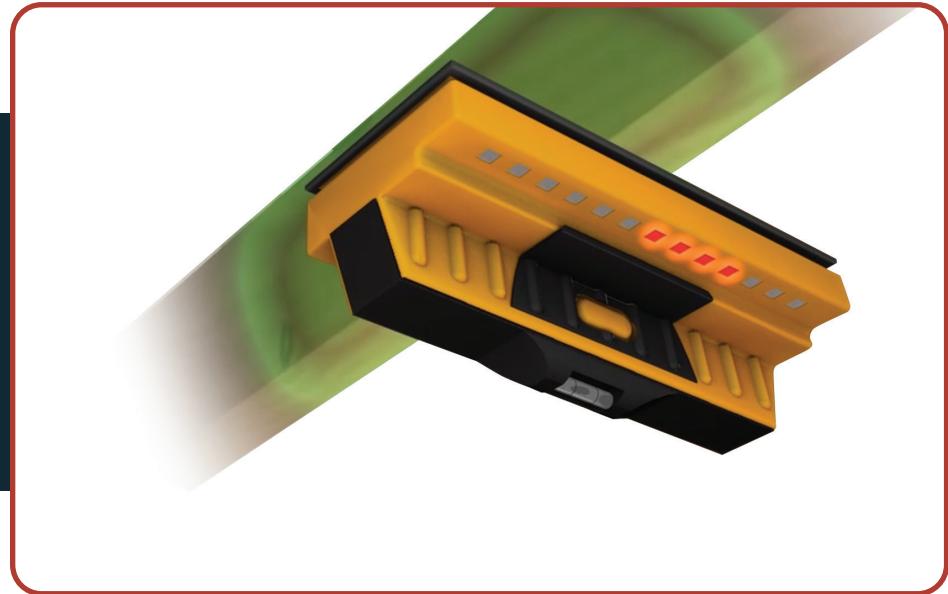

Pre-drill with a **3/16"** **drill bit** before inserting lag screws.



CONFIGURATION “A”: PARALLEL WITH CEILING JOISTS


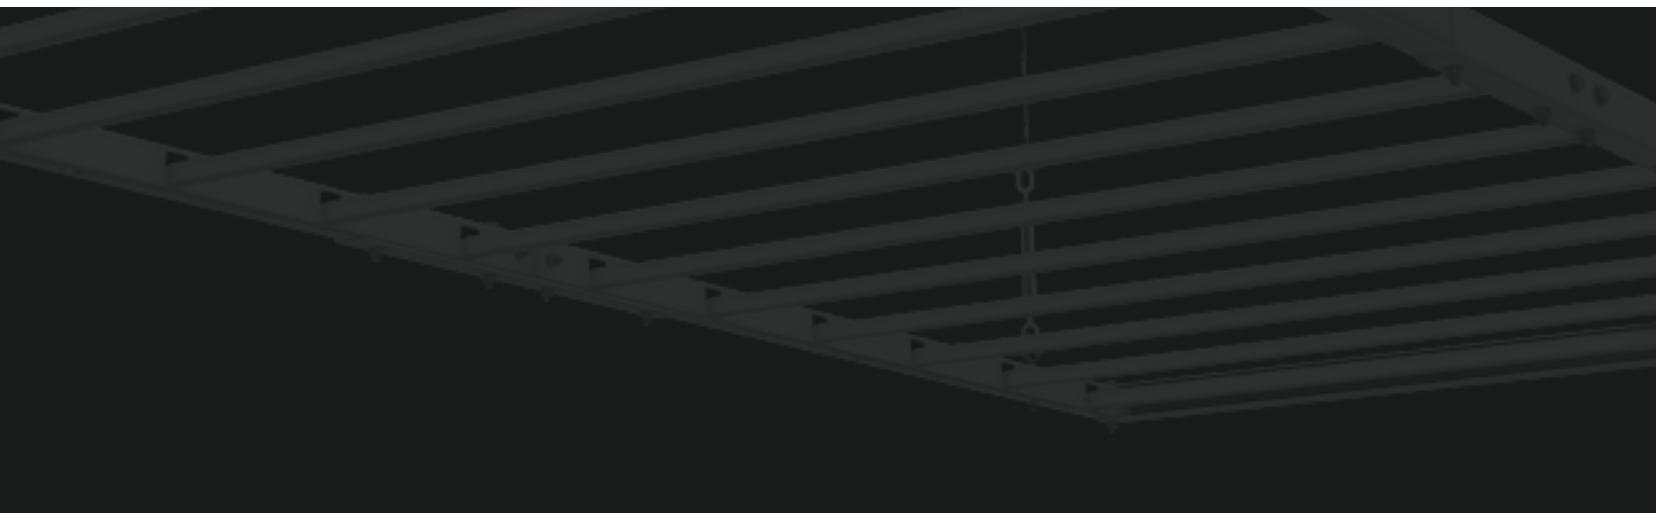




CONFIGURATION “A”: PARALLEL WITH CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Mount one half of any **Support Rail**. Pre-drill and fasten with **(4) Lag Screws and Washers**.

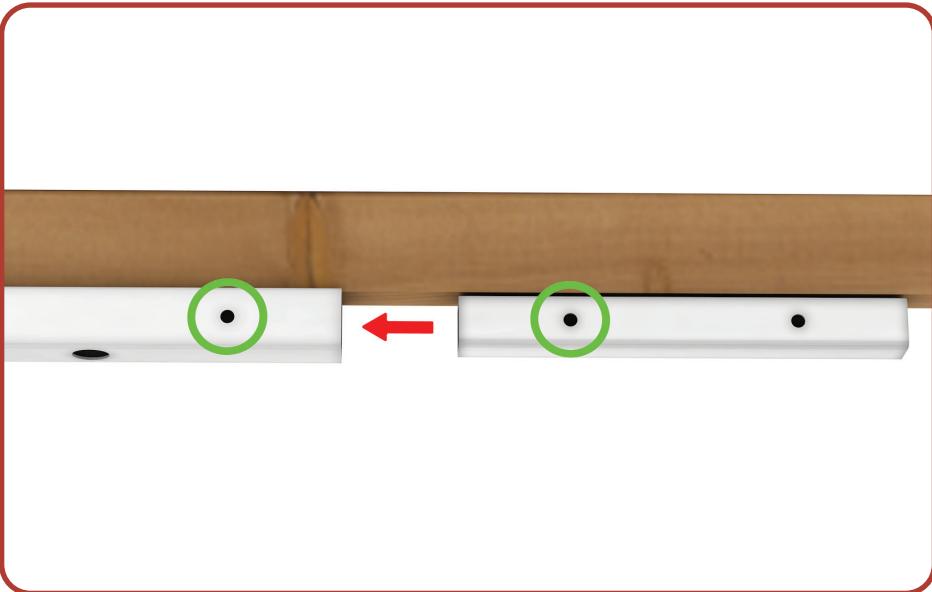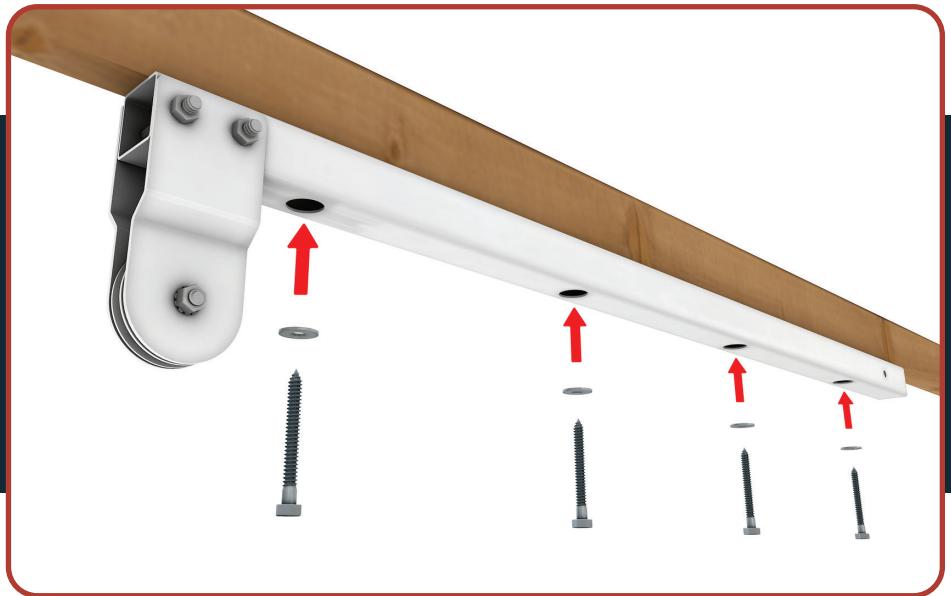


Insert the **Rail Connector** and align the first hole with the end of the rail.



CONFIGURATION “A”: PARALLEL WITH CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Fix the Connector in place with a **Hex Bolt** (do not install a nut yet).

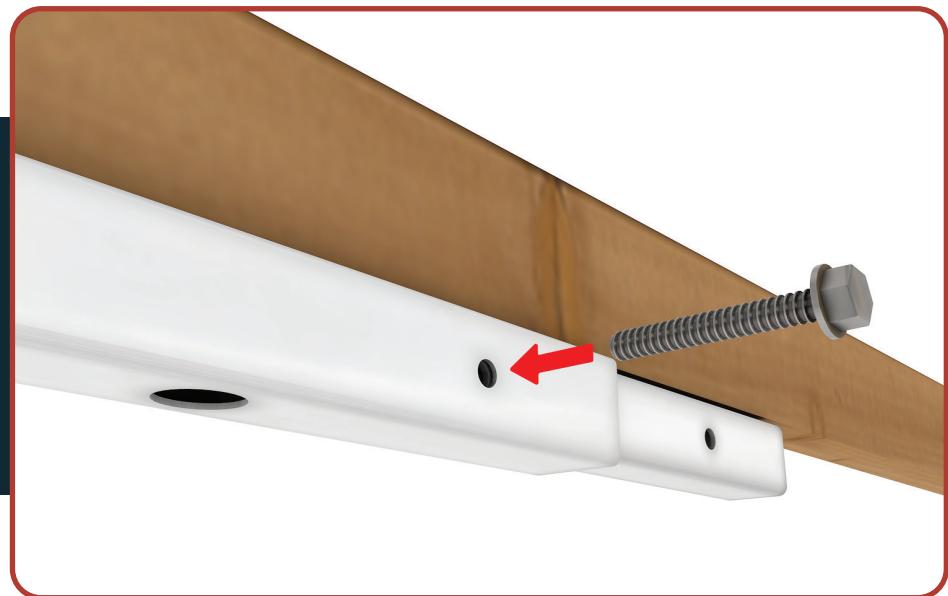

Attach the second half of the **Support Rail**.







CONFIGURATION “A”: PARALLEL WITH CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Insert a second **Hex Bolt**
(no nut yet).

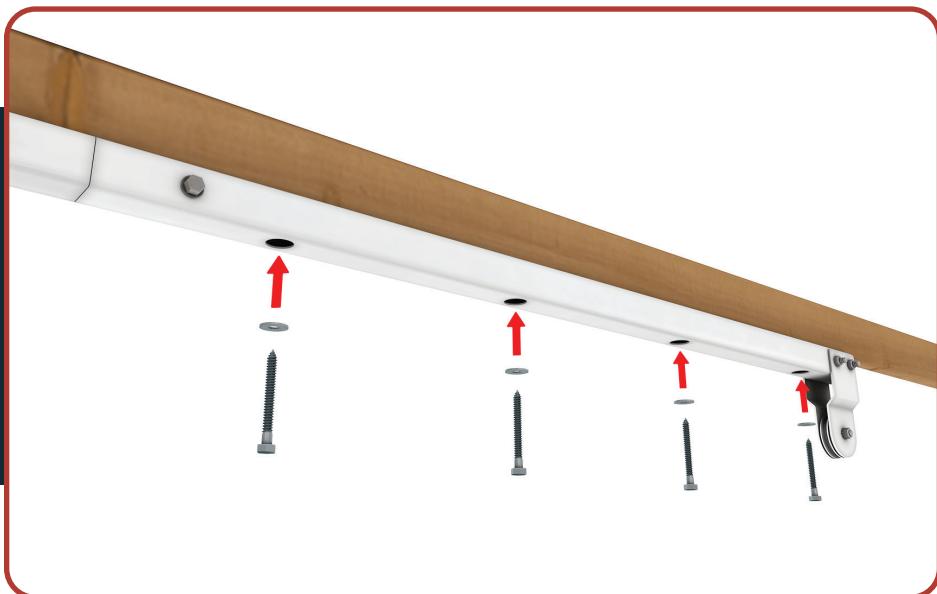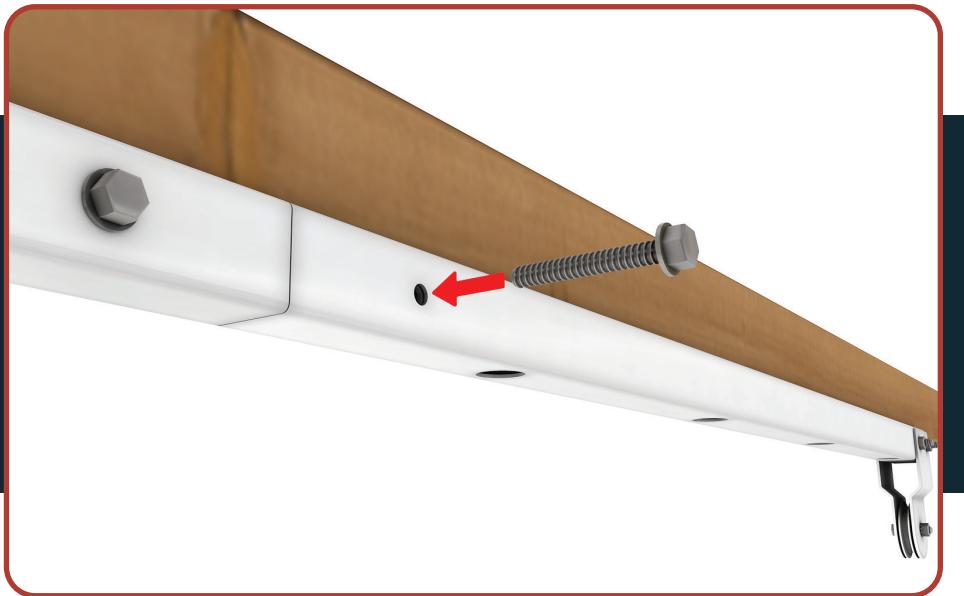


Mount the completed rail
using the remaining **Lag
Screws and Washers**.




CONFIGURATION “A”: PARALLEL WITH CEILING JOISTS


STEP 1: MOUNT YOUR SUPPORT RAILS

Install the second
Support Rail
48” center-to-center
and repeat the steps.

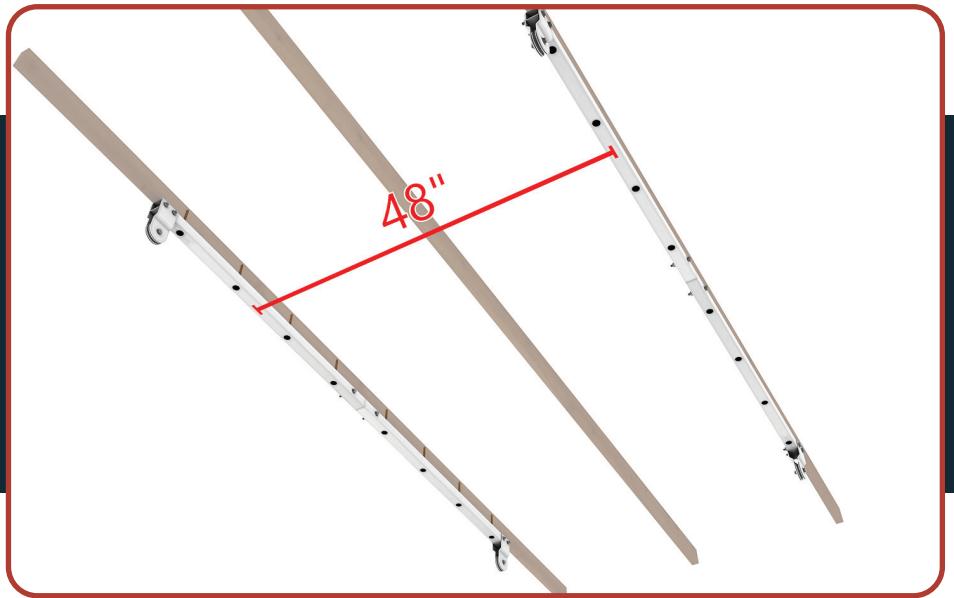


Ensure **both rails** are
perfectly aligned.
1" tolerance.

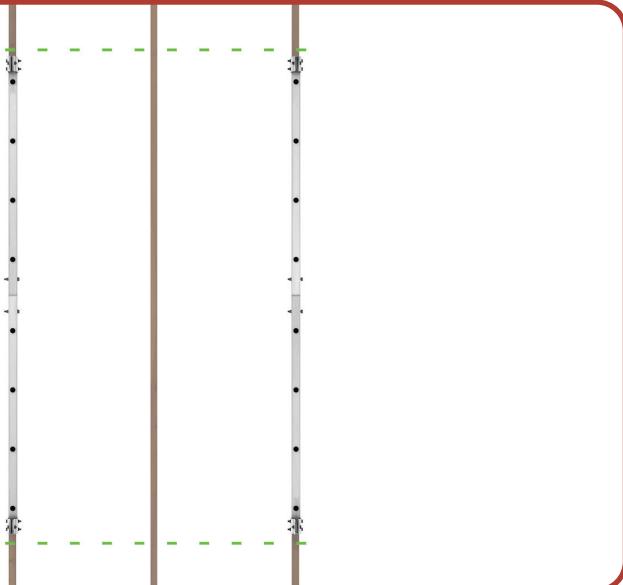

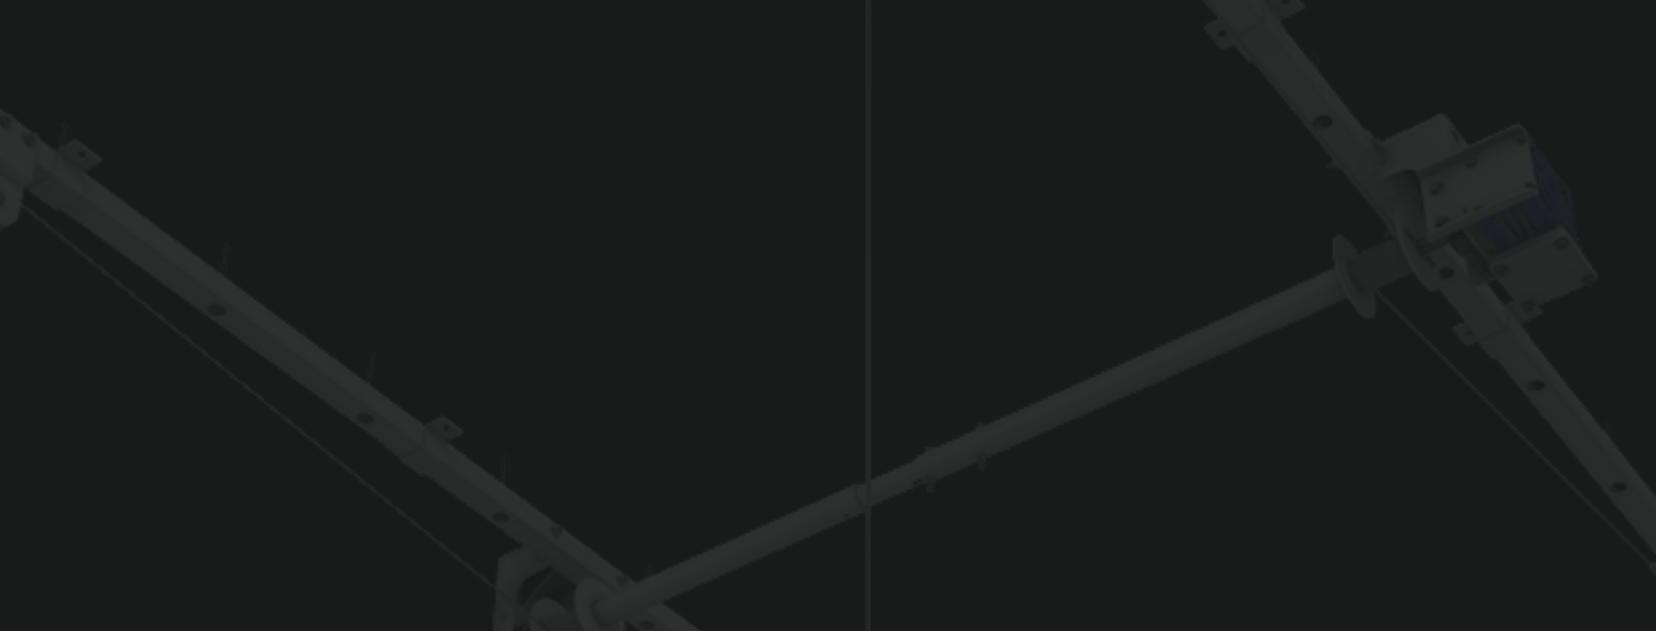

CONFIGURATION “B”: PERPENDICULAR TO CEILING JOISTS


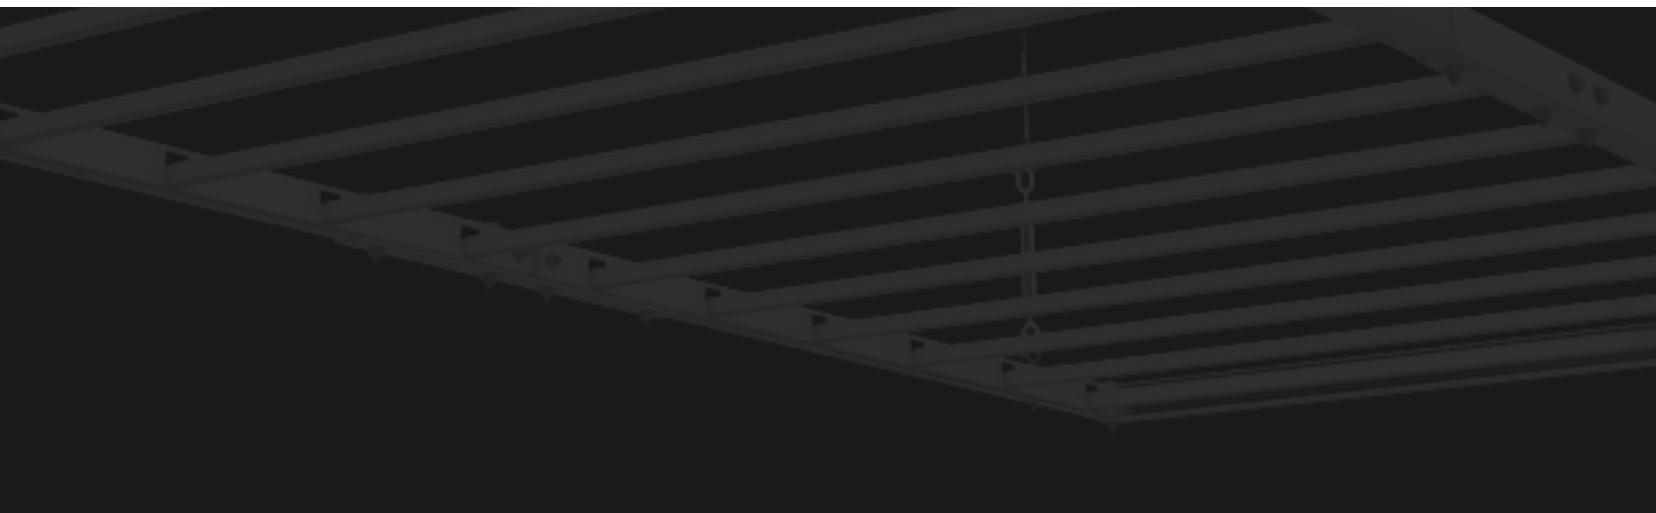




CONFIGURATION “B”: PERPENDICULAR TO CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Mount the first half of a Support Rail using **U-Clamps**.

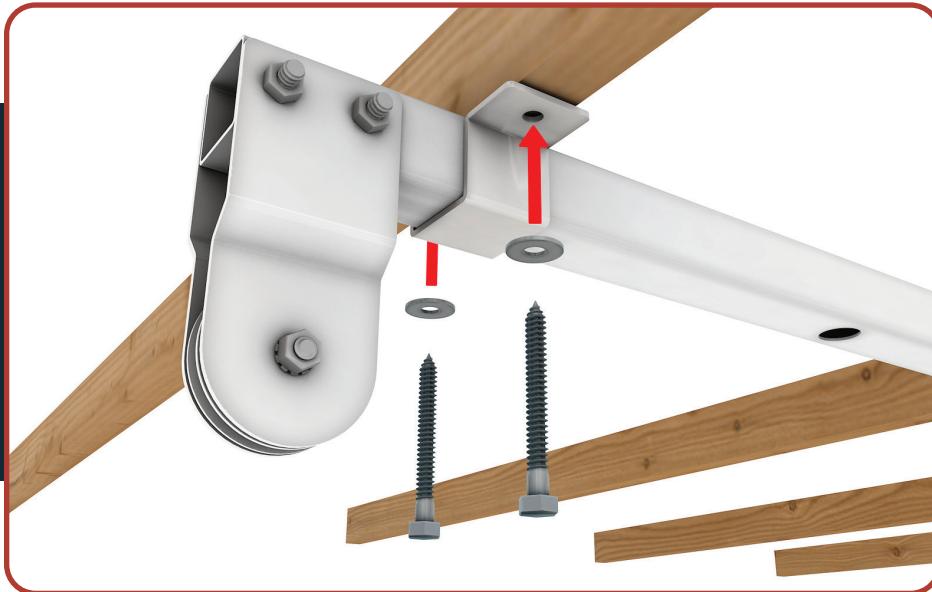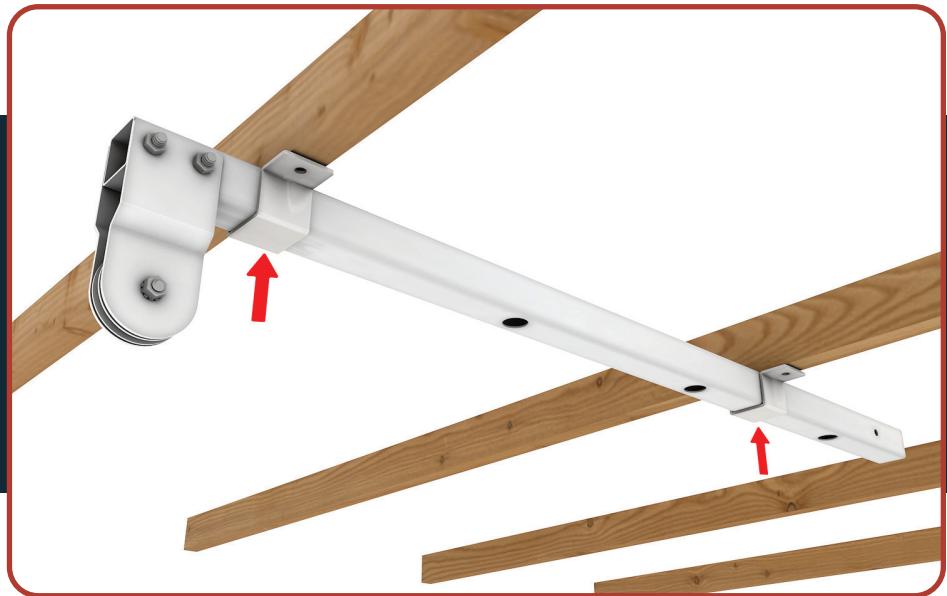


Pre-drill and fasten each U-Clamp with a **Lag Screw and Washer**.



CONFIGURATION “B”: PERPENDICULAR TO CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Insert the **Rail Connector** and align the holes.

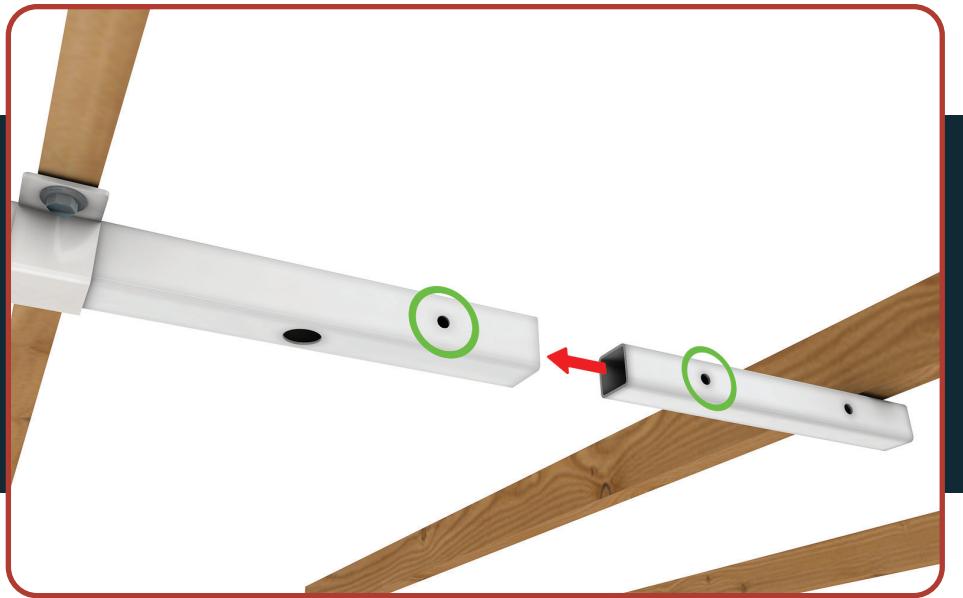

Fix the Connector in place with a **Hex Bolt** (no nut yet).




CONFIGURATION “B”: PERPENDICULAR TO CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Attach the second half of
the **Support Rail**.



Insert the second
Hex Bolt (no nut yet).

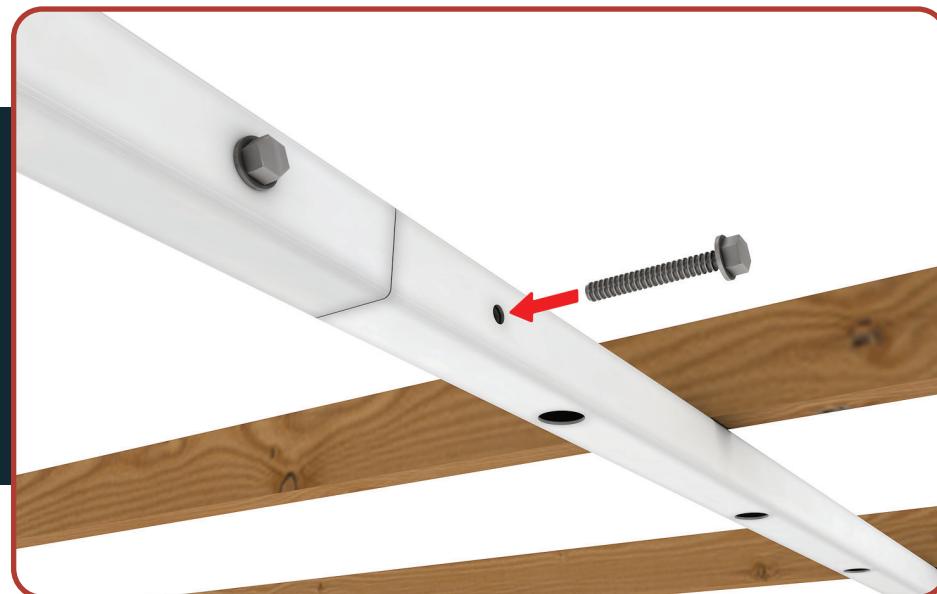




CONFIGURATION “B”: PERPENDICULAR TO CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Mount the second half
using **U-Clamps**.



Pre-drill, and secure with
Lag Screws.


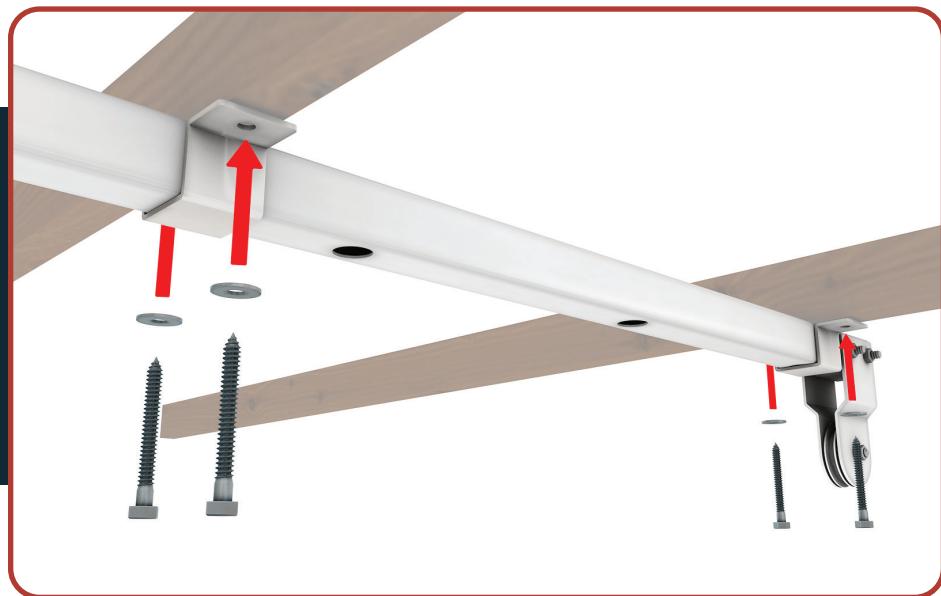




CONFIGURATION “B”: PERPENDICULAR TO CEILING JOISTS

STEP 1: MOUNT YOUR SUPPORT RAILS

Install the second Support Rail **48"** center-to-center.

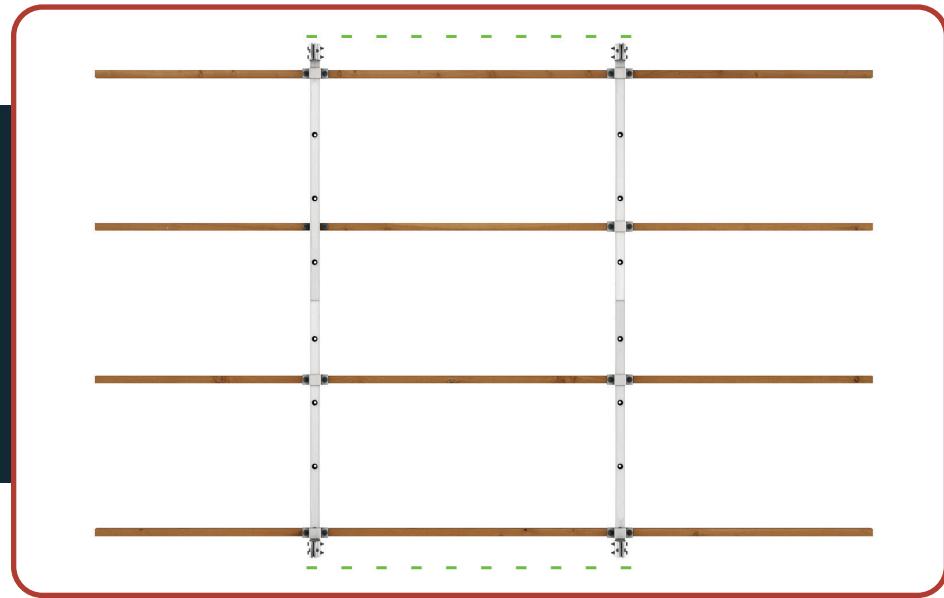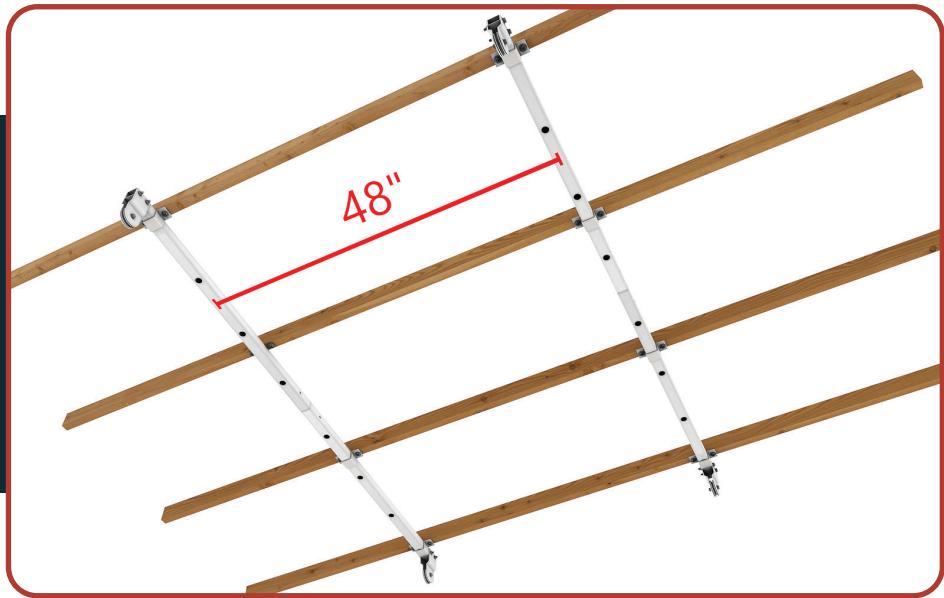

Ensure alignment.
1" tolerance.



INSTALL THE AXLE-ROD ASSEMBLY

STEP 2: INSTALL THE AXLE-ROD ASSEMBLY

Unwind the cables completely from the spools. Choose which side the **gearbox** will be installed on.




Mount the gearbox onto the Hex Bolts on the **Support Rail**.



INSTALL THE AXLE-ROD ASSEMBLY

STEP 2: INSTALL THE AXLE-ROD ASSEMBLY

Secure the gearbox
using **Star Nuts**.

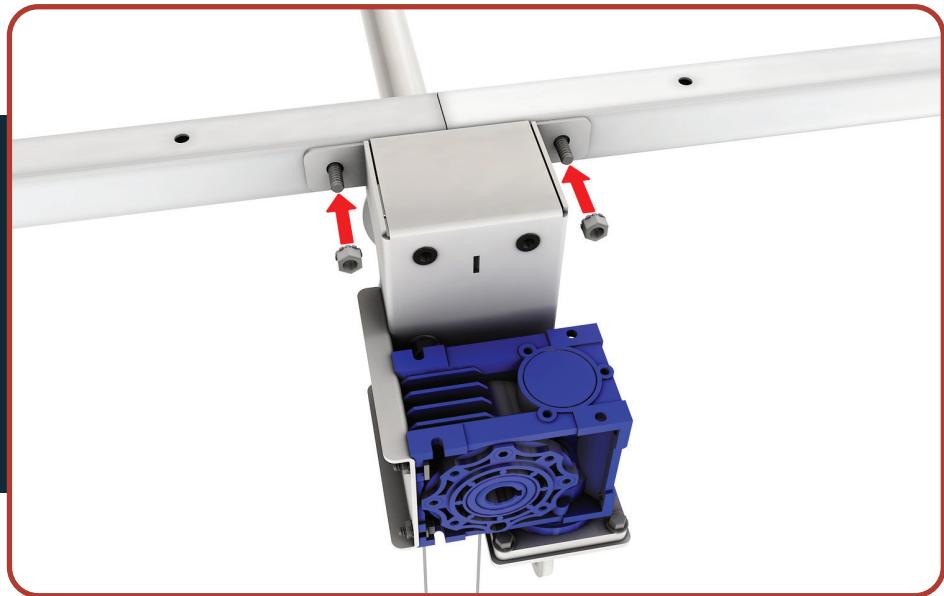



Insert the **second**
Axle-Rod into the first.



INSTALL THE AXLE-ROD ASSEMBLY

STEP 2: INSTALL THE AXLE-ROD ASSEMBLY

Attach the second **Axle Mount** and secure with **Star Nuts**.

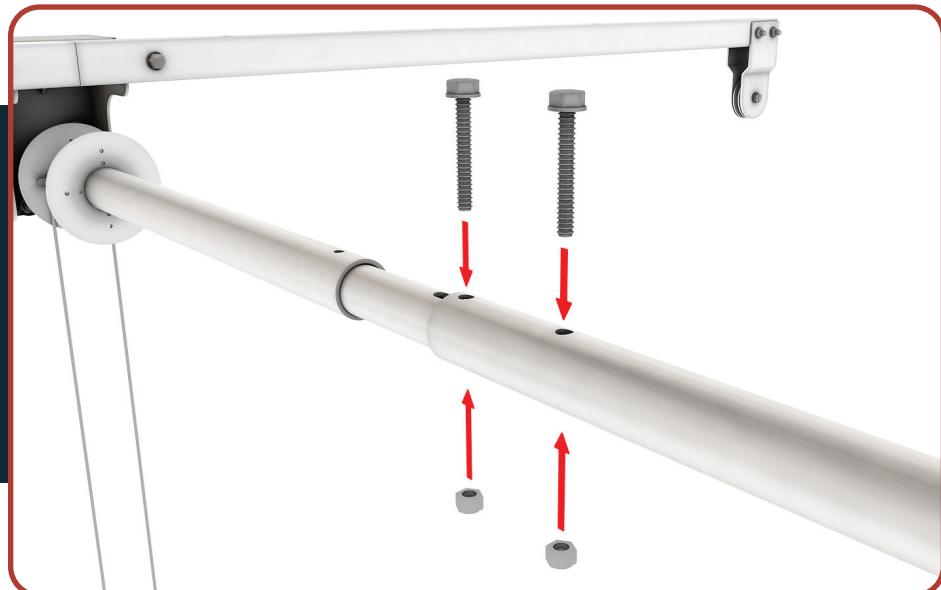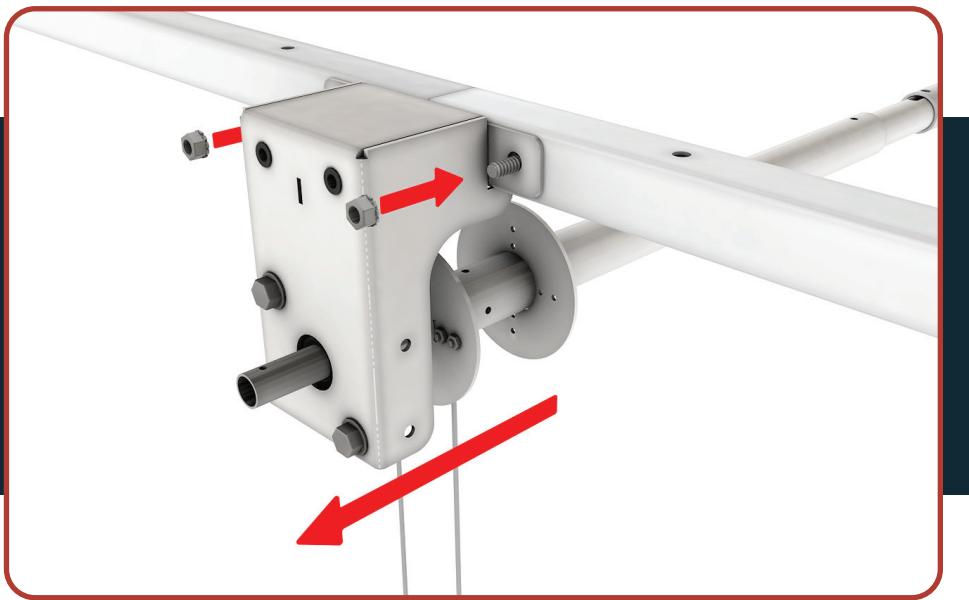


Insert two **Hex Bolts** through the Axle-Rod and secure with **Nylock Nuts**.



INSTALL THE AXLE-ROD ASSEMBLY

STEP 2: INSTALL THE AXLE-ROD ASSEMBLY

Tighten the bolts using
a drill and wrench.

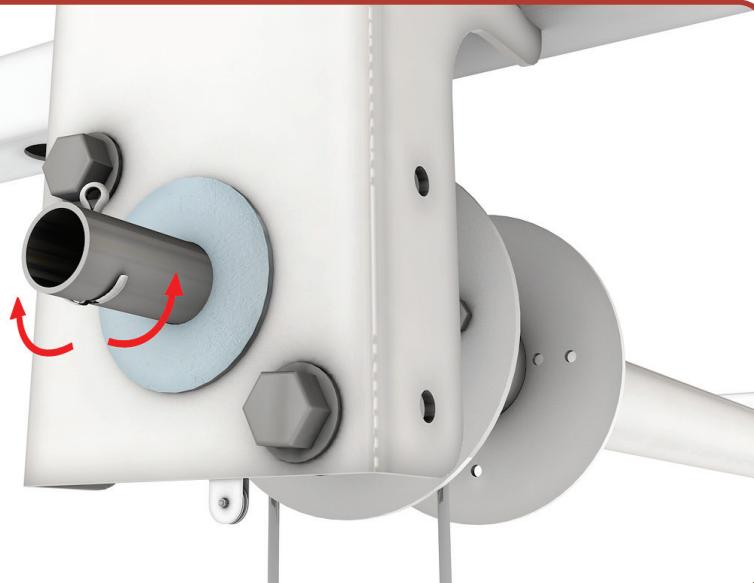



Slide the **large washer** onto the Axle-Rod, insert the **Security Pin**, and **bend the tips upward** to lock in place.



ROUTE THE CABLES

STEP 3: ROUTE THE CABLES

Feed the cables and turnbuckles through the **pulley brackets**.

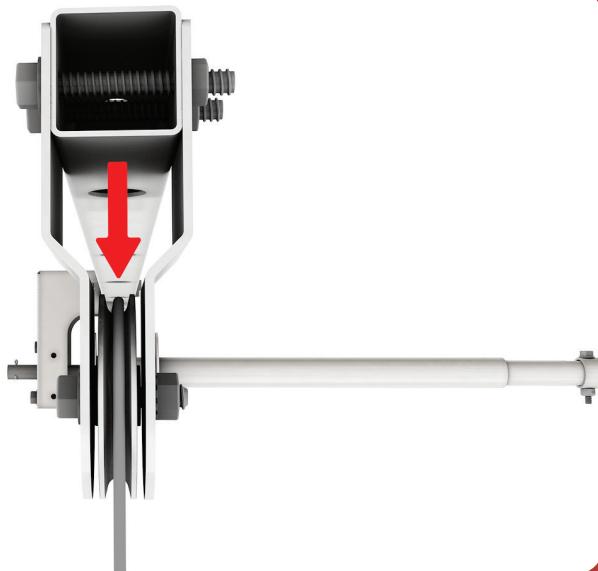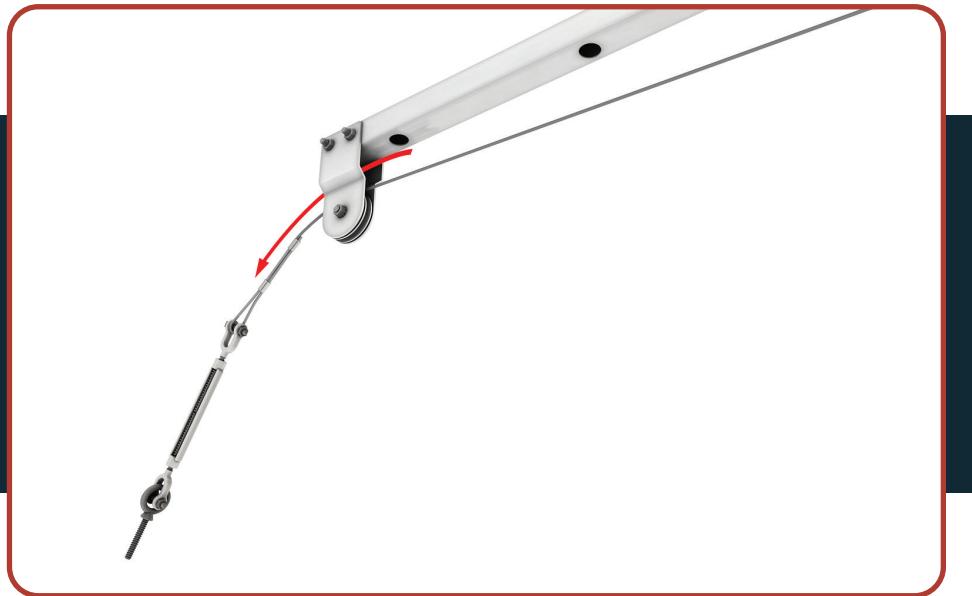


Ensure each cable sits correctly **in the wheel grooves**.



FRAME ASSEMBLY

STEP 4: ASSEMBLE THE FRAME

Align two **Frame Sides** end-to-end.

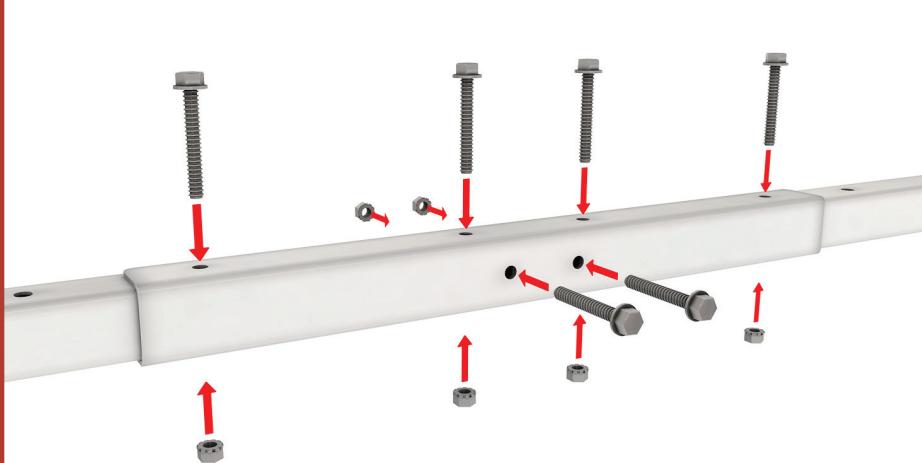

Join them using a **Frame Connector, Hex Bolts, and Star Nuts.**
Repeat for the second pair.



FRAME ASSEMBLY

STEP 4: ASSEMBLE THE FRAME

Attach each assembled Frame Side to its corresponding **Eye Bolts** using **Nylock Nuts**.



- **Important:** Eye Bolts must be installed **straight down (90°)** from the ceiling.
- Misalignment may cause **system failure or safety hazards.**



FRAME ASSEMBLY

STEP 4: INSTALL FRAME ENDS & SUPPORT BARS

Attach the **Frame Ends** using Hex Bolts and Star Nuts.




Insert the **Support Bars** into the holes on the **Frame Sides**.




FRAME ASSEMBLY

STEP 4: INSTALL FRAME ENDS & SUPPORT BARS

Secure each bar with a black **plastic plug**.

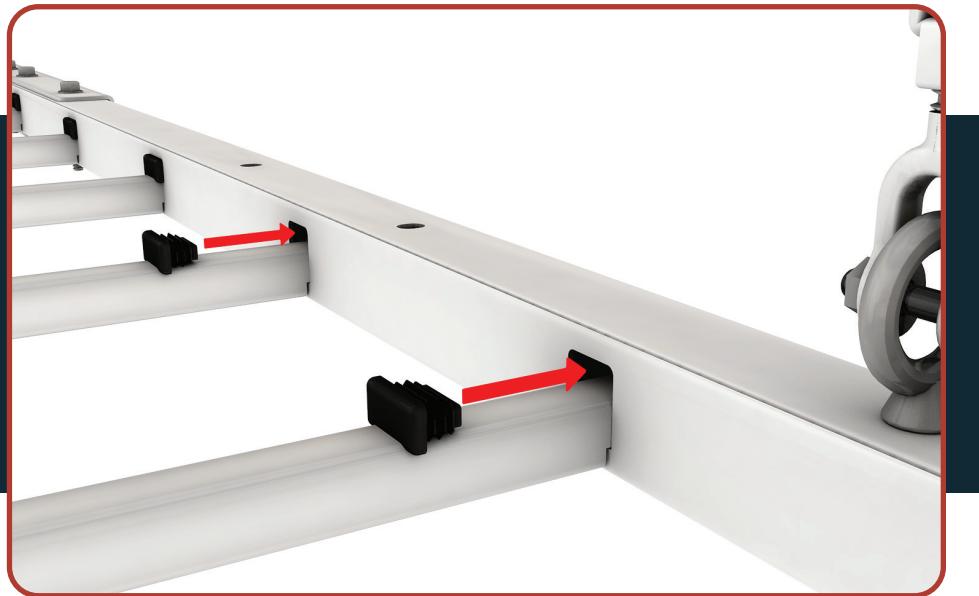

Tap gently with a **rubber mallet**.

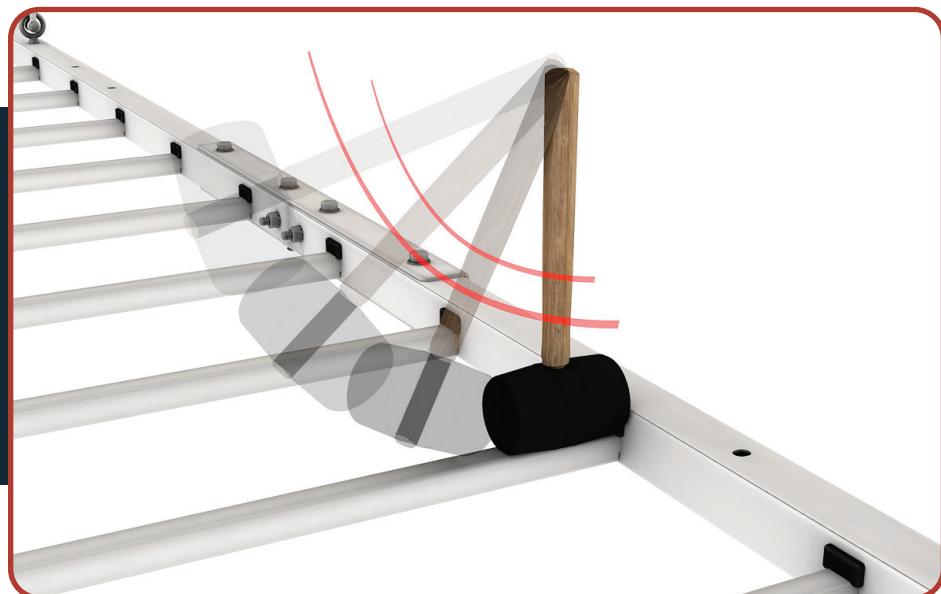



LEVEL THE FRAME

STEP 5: LEVEL THE FRAME

Ensure your **drill battery** is fully charged.



Set your drill to its **highest torque setting** (usually indicated by a drill-bit icon).





LEVEL THE FRAME

STEP 5: LEVEL THE FRAME

Insert the **drill rod** and tighten the chuck.

You must have a
1/2" chuck.

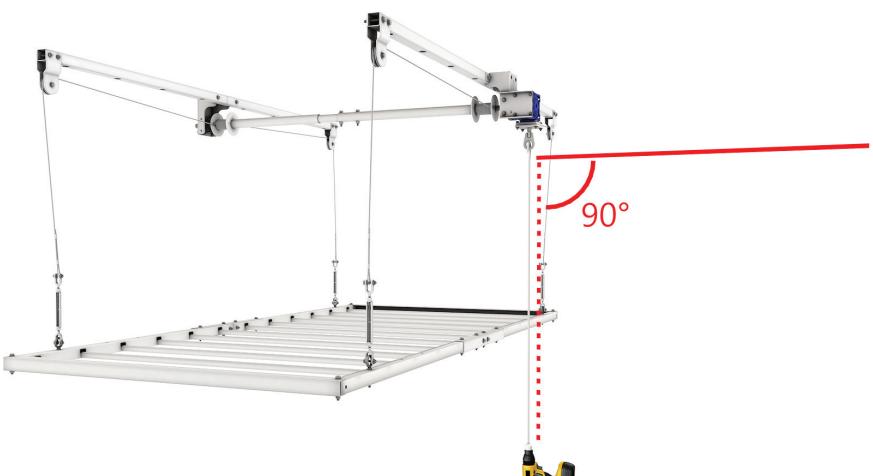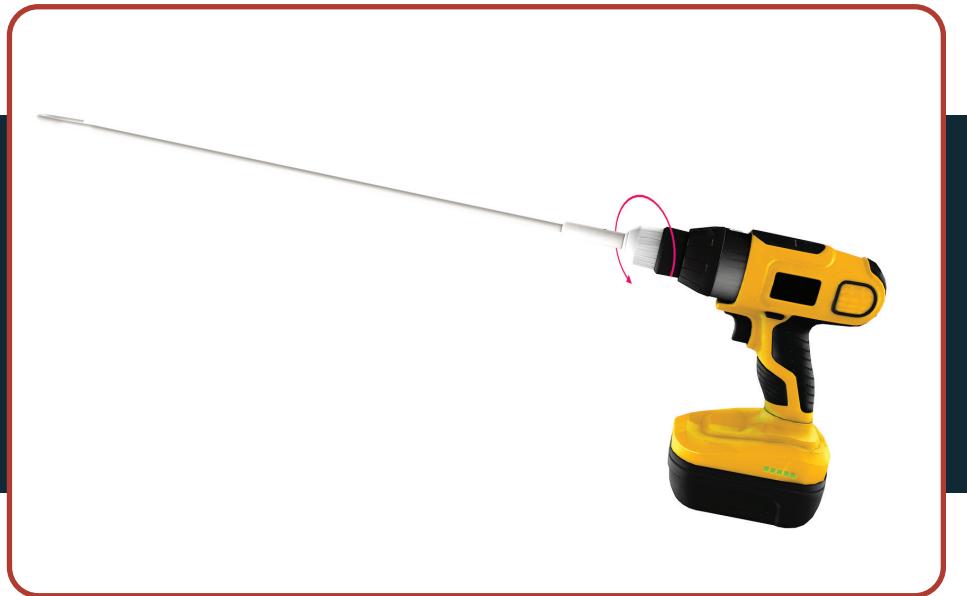

The drill rod must hang
perfectly vertical while
operating the system.




LEVEL THE FRAME

STEP 5: LEVEL THE FRAME

Before leveling, load 50 -100 lbs and **raise the frame 2-3 full rotations.**

Ensure the cables **spool evenly**; correct manually if needed.

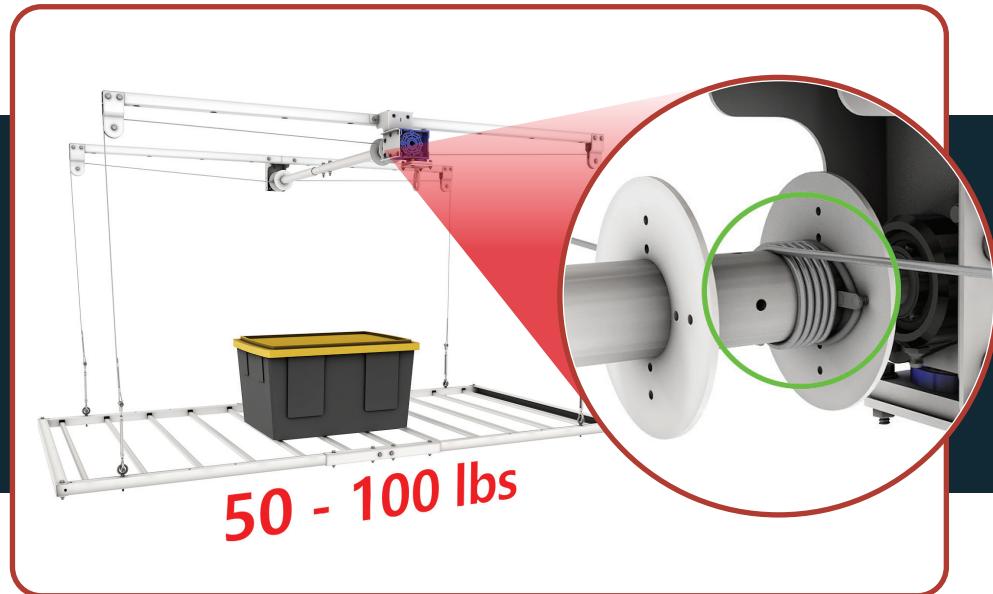

Use the **turnbuckles** to adjust and level the frame.



LEVEL THE FRAME

STEP 5: LEVEL THE FRAME

Use a **level** to fine-tune all four corners.




Ensure all **nuts and bolts** are fully tightened.



FINAL CHECKS

STEP 6: FINAL CHECKS

When loading the platform, **begin in the center** and distribute weight **evenly**.

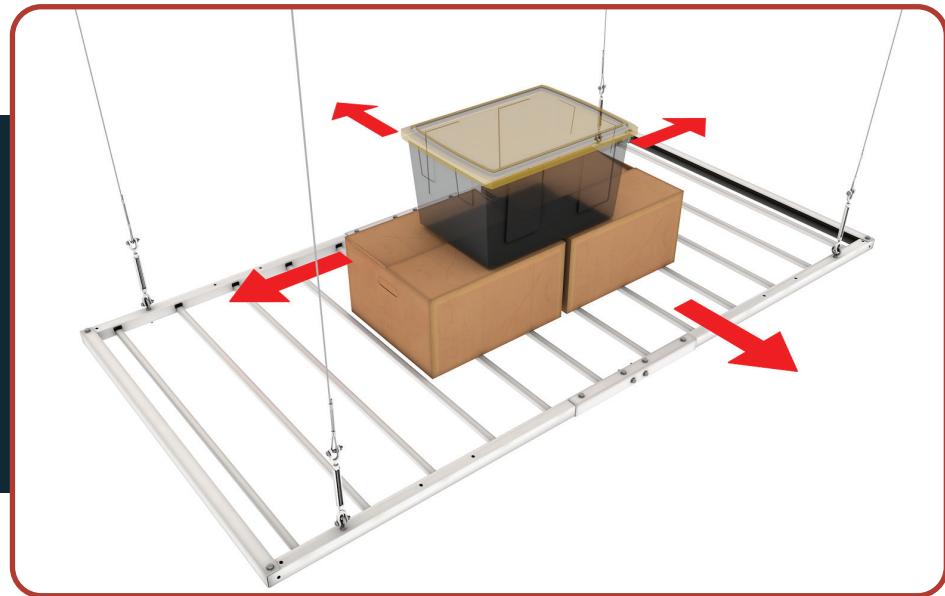


Test the lift with **at least 100 lbs** on the platform.



FINAL CHECKS

STEP 6: FINAL CHECKS

Ensure the first three cable wraps spool evenly
— **this is critical.**

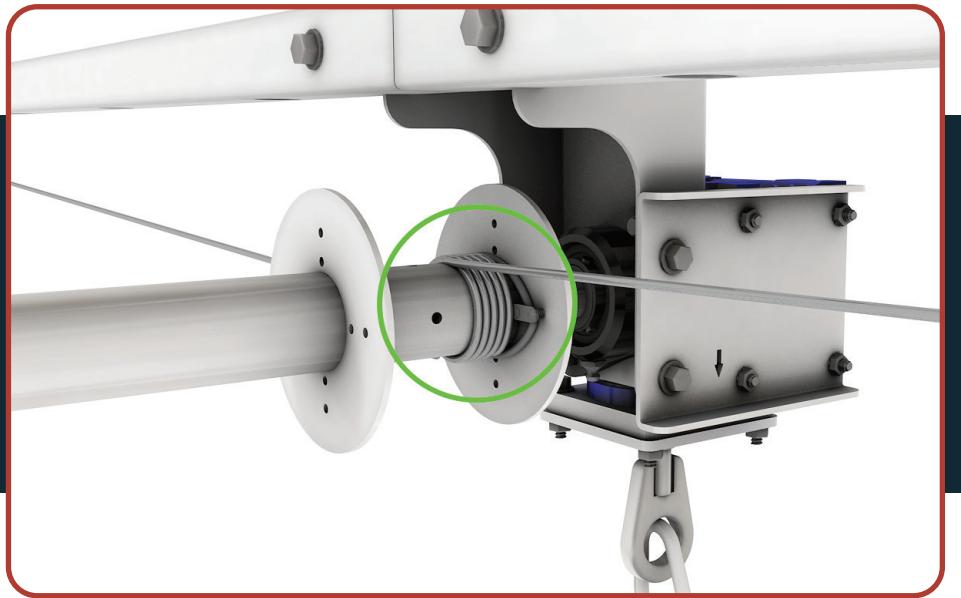



Never raise the platform closer than **18 inches** from the ceiling.



FINAL CHECKS

STEP 6: FINAL CHECKS

When lowering, **always** keep at least **three wraps of cable** on the spool.

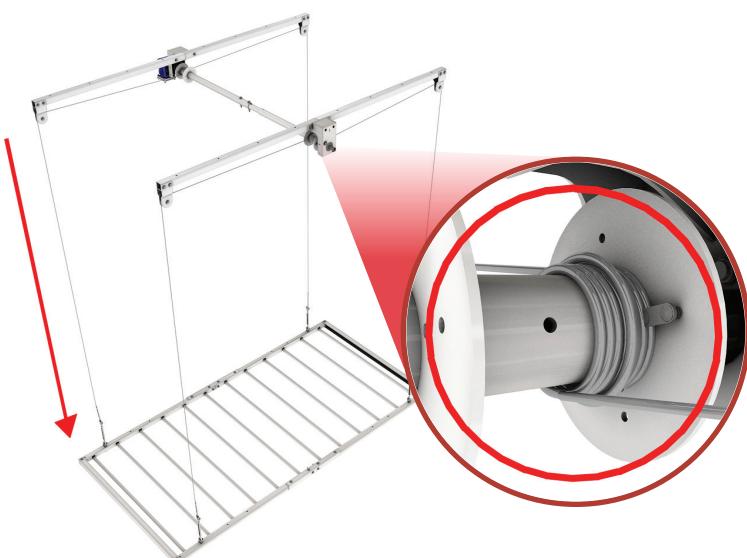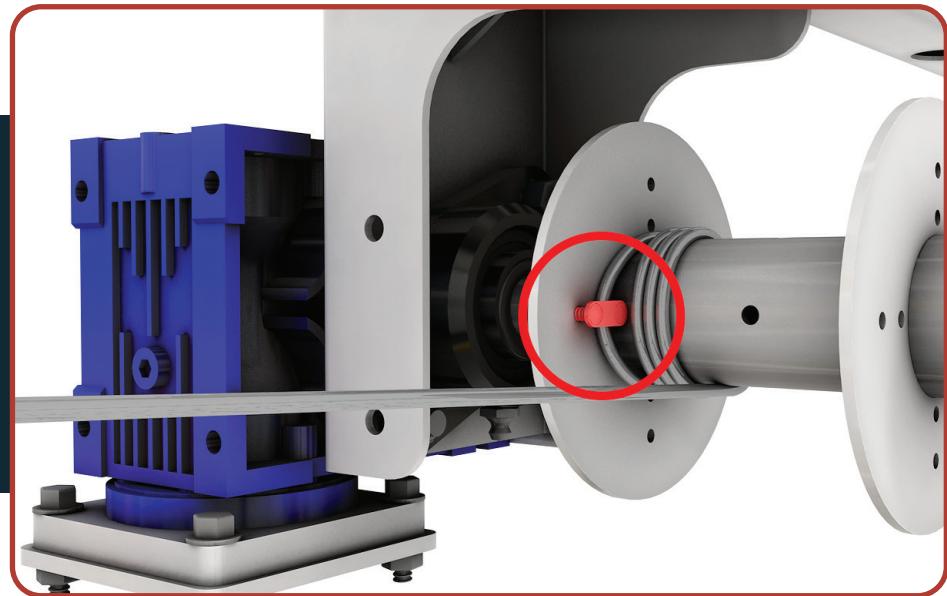

If cables spool unevenly, **fully lower the system**, unload, and correct the issue.





FINAL CHECKS

STEP 6: FINAL CHECKS

Load **50–100 lbs evenly** and raise slowly to ensure proper spooling before full use.

50 - 100 lbs.

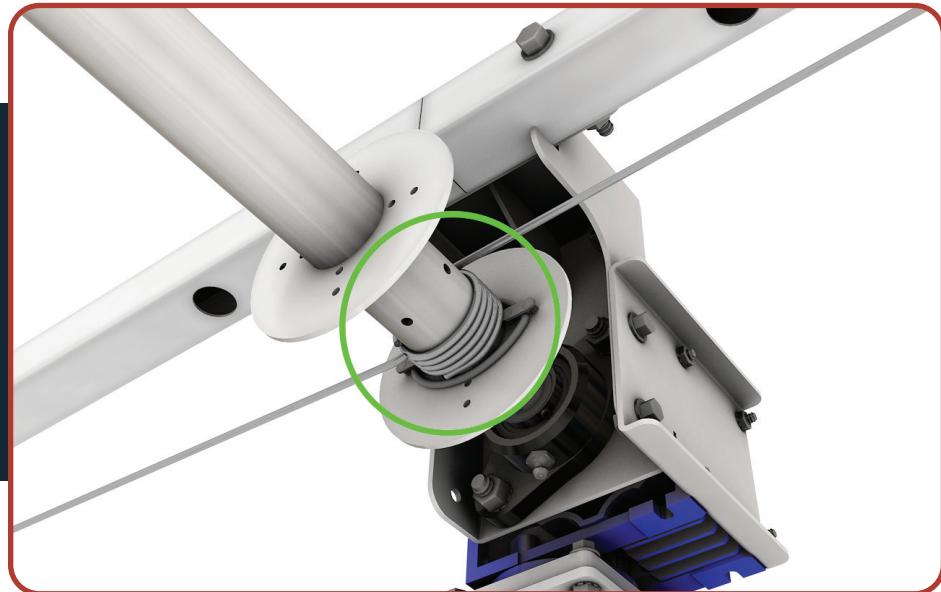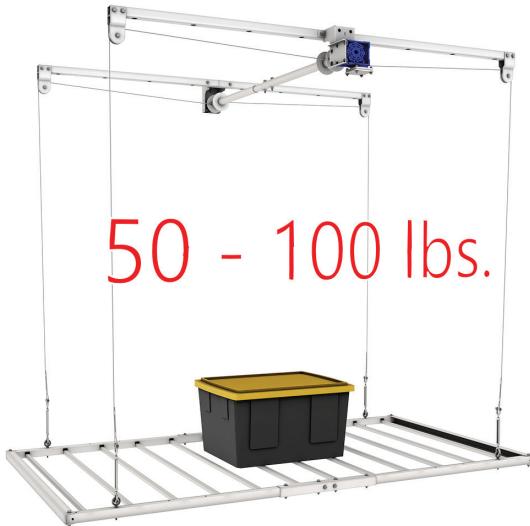


Once spooling is correct,
reload the platform.



FINAL CHECKS


STEP 6: FINAL CHECKS

Always load from the center outwards.

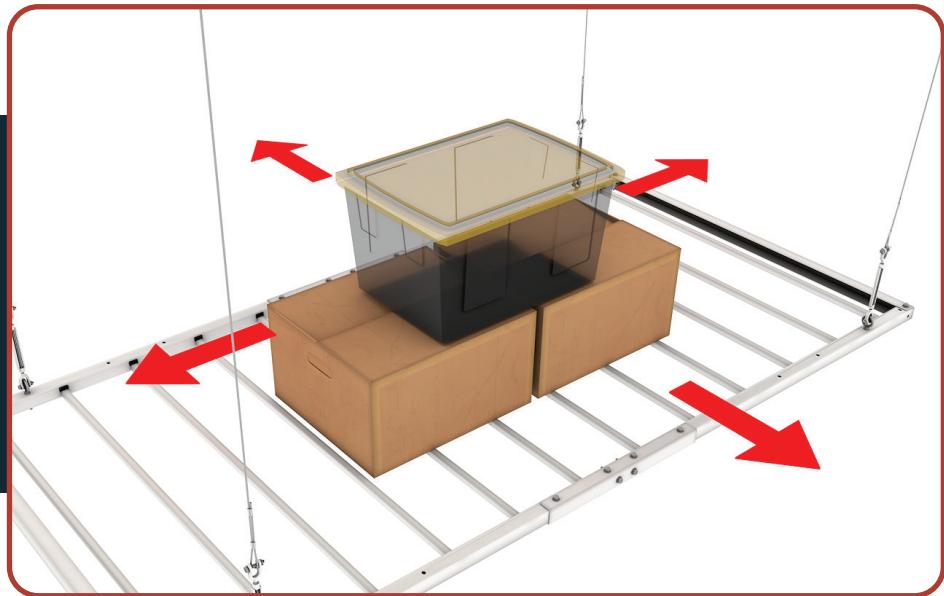

- **E-Z Lift Pro:** Lowers up to 8 ft. from the ceiling.
- **E-Z Lift Pro Max:** Lowers up to 11 ft. from the ceiling.

**CONGRATULATIONS!
YOUR INSTALLATION IS COMPLETE.**

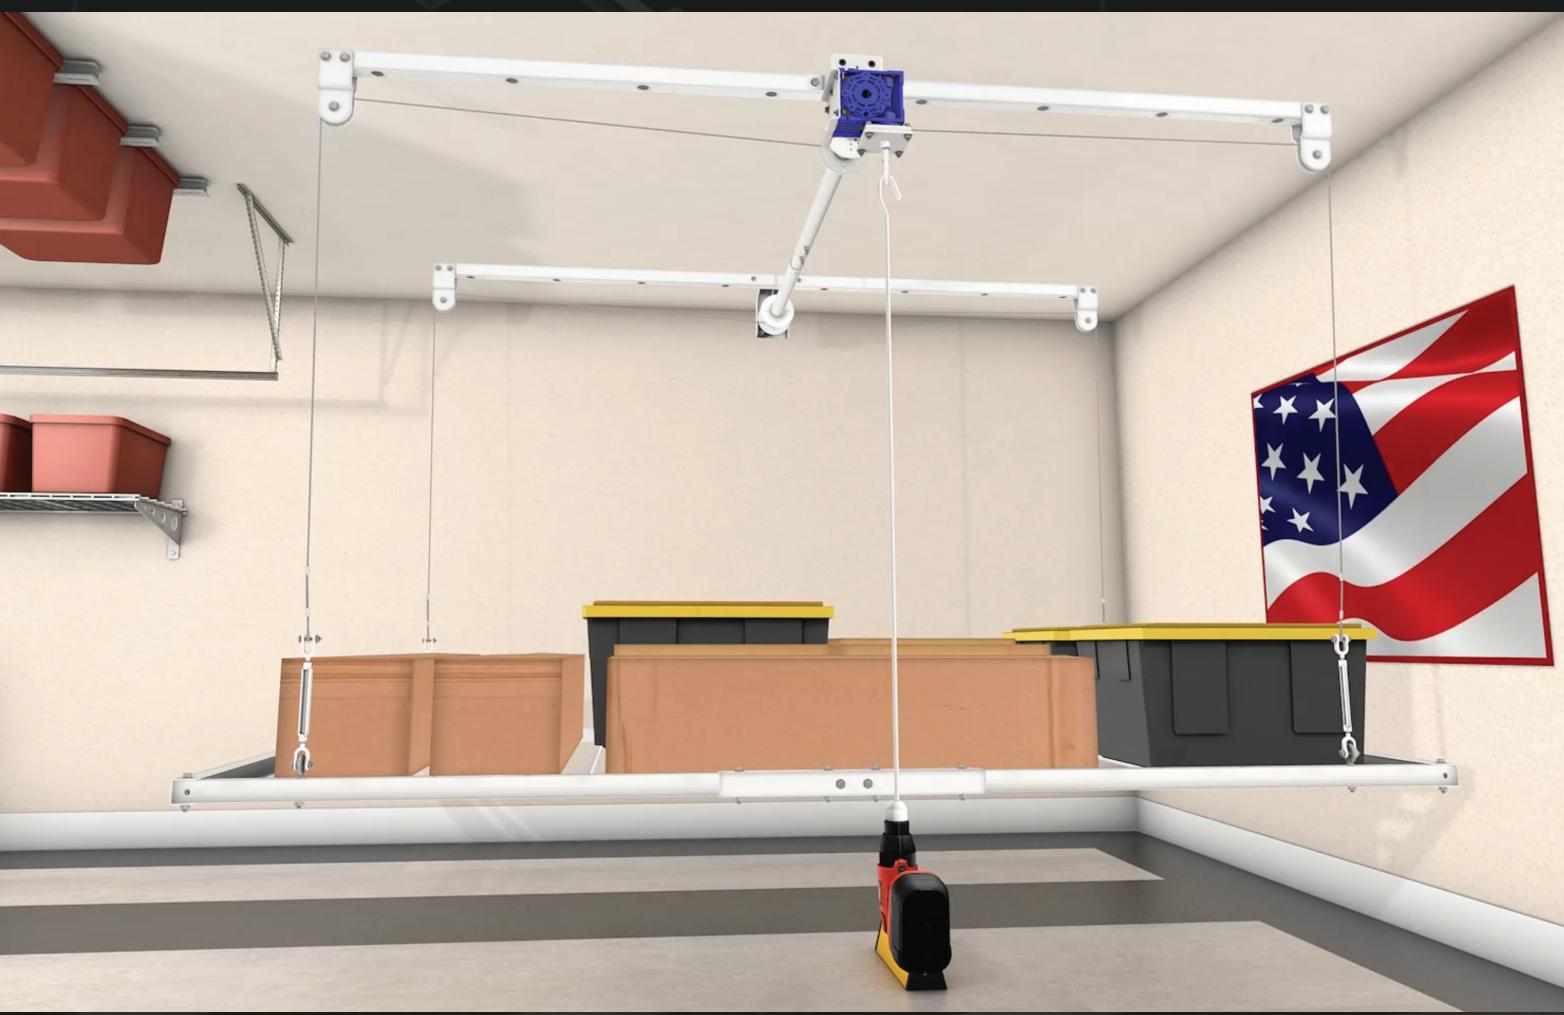

**ENJOY YOUR NEWLY
ORGANIZED GARAGE!**

HANDYMAN OR CONTRACTOR?

BECOME AN
AUTHORIZED DEALER



ASK ABOUT OUR
WHOLESALE
PROGRAM 😎



SCAN TO APPLY

NEED MORE STORAGE?



CHECK OUT OUR OTHER PRODUCTS 😊



MANUFACTURED 100% IN THE U.S.A.





WE APPRECIATE
YOUR REFERRALS!

SHARE THIS COUPON CODE WITH
YOUR FRIENDS AND FAMILY FOR
\$50 OFF ORDERS OVER \$400



REFERRAL50

EZgarageStorageUSA.com



\$50 OFF COUPON

ORDERS OVER \$400

Coupon Code:

REFERRAL50



EZgarageStorageUSA.com

480-907-3921

contact@ezgaragestorageusa.com